


COREMATIC

FEATURES

- ▶ Industry first pneumatic capping press for SFIC
- ▶ Designed to be maintenance free and pneumatic only
- ▶ Compact footprint and can be bolted down for secure placement
- ▶ Vastly improved ease of operation over traditional manual press
- ▶ Works with 6 or 7 pin cores
- ▶ Available for 0.150" or 0.140" spacing

PART NUMBER	DESCRIPTION
CMT-001	Corematic, 0.140" spacing
CMT-002	Corematic, 0.150" spacing
CMT-A01	Capping assembly only, 0.140" spacing
CMT-A02	Capping assembly only, 0.150" spacing
CMT-S01U	Capping strip only, 0.140" spacing
CMT-S02U	Capping strip only, 0.150" spacing

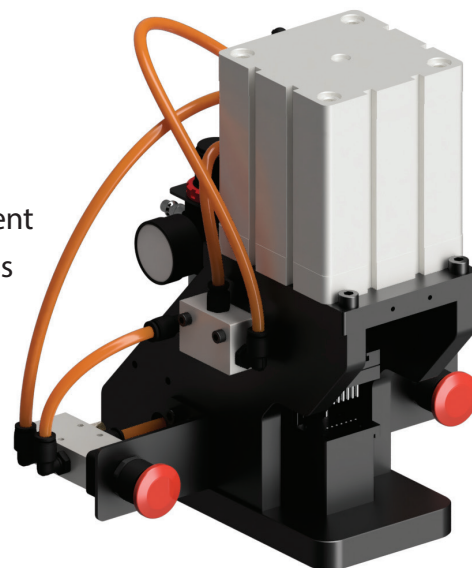



Specifications:

Dimensions (W x D x H): 12.6" x 10.4" x 12.8"

Shipping Weight: 45 lb.

Pneumatic Supply: 110psi min., 2.0 SFM @ 90 psi, 2 gal.

Pneumatic Connection: I/M plug for quick connect

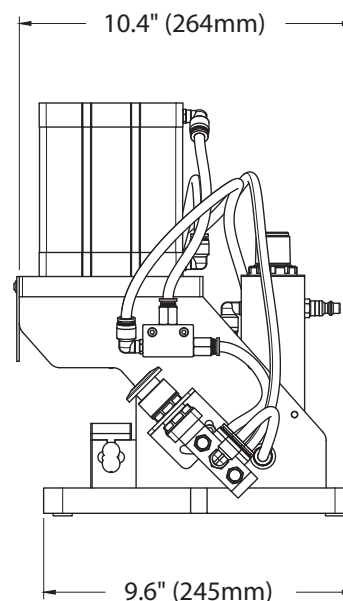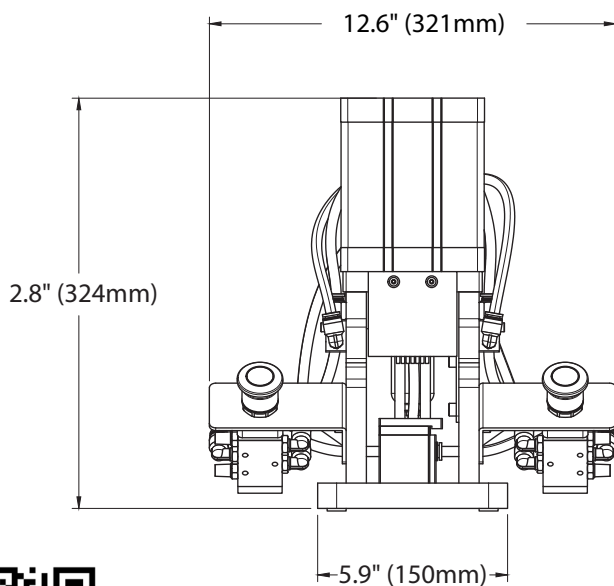

GMS Industries, Inc.
6805 S 220th Street, Kent, WA 98032
877 704-5625



A PERFECT FIT